


Sulfur Trioxide Decomposer Sizing for a Nuclear Hydrogen Production by a SI Process

Jihwan Kim, Jiwoon Chang, Youngjoon Shin, Kiyong Lee, Wonjae Lee, Jonghwa Chang
Korea Atomic Energy Research Institute 150 Dukjin-dong, Yuseong-gu, Daejeon, Korea 305-600
E-mail; kjh1223@kaeri.re.kr, Tel; +82 42 868 4719, Fax; +82 42 868 8549

1. Introduction

Hydrogen can be an attractive energy if it can be produced cleanly and in a cost effective manner. Nuclear energy can be used as a source of a high temperature process up to 1000°C for a hydrogen production. The sulfur-iodine (SI) cycle is a baseline candidate thermo-chemical process. It consists of the following three chemical reactions which yield a dissociation of water [1].



The decomposition at a high temperature of the sulfuric acid is the most energy-demanding reaction both from fundamental and applied points of views which represents the key reaction of the whole SI cycle.

In this paper, a shell-and-catalyst-packed-tube type is selected and its fluidic characteristics are applied to an overall heat transfer coefficient calculation. As a result of the study, the sulfur trioxide decomposers for 300mole/s (200MW_{th} VHTR 40% thermal efficiency) and 60mole/s (40MW_{th} VHTR 40% thermal efficiency) hydrogen production rates are presented and discussed.

2. Sizing Procedure for Sulfur Trioxide Decomposer

2.1. Modeling

The rate equation for the decomposition of sulfuric acid was based on equation (4), whereas the reaction rate constant is equation (5).

$$-r_{SO_3} = -k_d C_{SO_3} \quad (4)$$

$$k_d = A \exp(-E_a / RT) \quad (5)$$

The rate equation is an irreversible 1st order equation and the reaction rate constant is the Arrhenius equation which is a function of the temperature.

For the sulfur trioxide decomposition in the presence of catalyst WX-2 [2], the activation energy and pre-exponential factor are -73.0526kJ/mol and -68055s⁻¹ [3] respectively. Fig. 1 shows the non-isothermal plug flow reactor model for the sulfur trioxide decomposer.

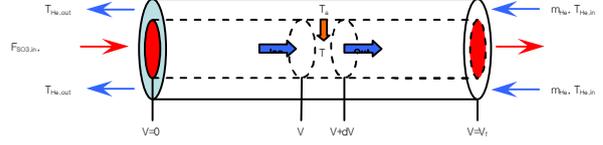


Fig. 1. Non-isothermal plug flow reactor model for sulfur trioxide decomposer

$$\frac{dF_{SO_3}}{dV} = -r_{SO_3} \quad (6)$$

$$\frac{dT_{SO_3}}{dV} = \frac{Ua(T_{He} - T_{SA}) + r_{SO_3}\Delta H_{RX}}{\sum F_i c_{p,i}} \quad (7)$$

$$\frac{dT_{He}}{dV} = \frac{Ua(T_{He} - T_{SO_3})}{F_{He} c_{p,He}} \quad (8)$$

Equation (6) is the material balance equation for the plug flow reactor and equations (7) and (8) are the ordinary differential equations of the process gas and the Helium temperature change respectively. Heat of reaction is obtained from HSC5.1 [4].

2.2. Overall Heat Transfer Coefficient Calculation

Fluidic characteristics of a process stream are applied to calculate the overall heat transfer coefficient, which are as follows [5].

$$\frac{1}{U} = \frac{1}{h_o} + \frac{1}{h_i(D_i/D_o)} + \frac{1}{h_w} + \frac{1}{h_s} \quad (9)$$

$$h_i = 0.813 \frac{k_i}{D_i} \exp(-6D_p/D_i) \left(\frac{D_p G_i}{\mu_i} \right)^{0.9} \quad (10)$$

$$h_o = \frac{0.273 c_{p,o} G_o}{(c_{p,o} \mu_o / k_o)^{2/3} (D_o G_o / \mu_o)^{0.365}} \quad (11)$$

$$h_w = \frac{2k_t}{(D_o - D_i)} \quad (12)$$

Equations (10) and (11) are the catalyst-packed-tube and shell side heat transfer coefficient equations and equation (12) is the coefficient for the tube material. 5670 W/(m² K) for the fouling factor(h_s) is applied from the literature [5].

Thermal conductivity and viscosity are calculated by an equation for a highly pressurized gas phase [6] and the heat capacity is obtained from HSC 5.1 [4]. These properties are calculated at an operating temperature and are assumed to be constant throughout the temperature range. The thermal conductivity of a tube is 16.27 J/(s m K). Inside and outside diameter of a tube are fixed at 1/2in and 5/8in.

2.3. Sulfur Trioxide Decomposer Sizing

Table 1. Input/output conditions of the sulfuric acid decomposer

		H ₂ O	O ₂	SO ₃	SO ₂	He
Input (Gas)	Mole Flow Rate [mol/s]	531.7	0	481.2	0	17800
	Temperature [°C]	1,023				
Output (Gas)	Mole Flow Rate [mol/s]	532.6	148.44	184.3	296.9	17800
	Temperature [°C]	1,123				

Input/output conditions for a sulfur trioxide decomposer are represented in Table 1 based on a 300mole/s hydrogen production rate and the heat duty is 34900kJ/s. For the condition based on 40MW_{th}, each of the flow rates and heat duties is multiplied by 1/5 times. And the process gas and Helium pressures are 7.09 and 22 bar.

Then, the heat transfer area and tube length should be calculated by the following equations.

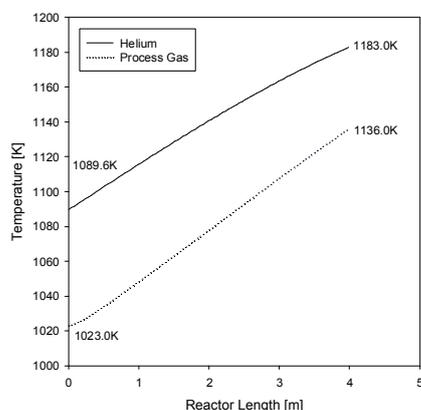


Fig. 2. Temperature profiles for a sulfur trioxide decomposer.

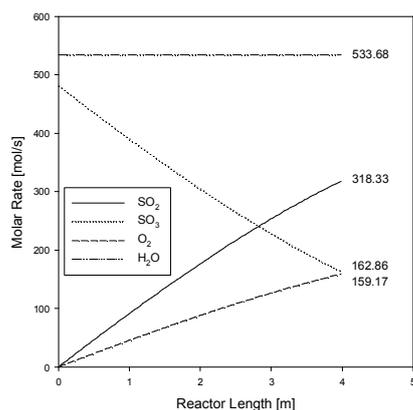


Fig. 3. Mole flow rate changes for a sulfuric trioxide decomposer.

$$A = \frac{Q}{U\Delta T_{lmd}} \quad (13)$$

$$L_t = \frac{A}{\pi n_t D_i} \quad (14)$$

Tubes are arranged in a triangular pitch and the tube pitch is 1.25 times that of the tube inside diameter. A gap of the tube bundle to the shell is 10cm.

Fig. 2 and 3 shows the steady state results for the sulfuric acid decomposer.

3. Conclusion

A sulfur trioxide decomposer sizing was accomplished and the results are as follows;

Table 2. Sizing results of the sulfur trioxide decomposer

Hydrogen production rate		300mole/s	60mole/s
Tube	Inside diameter [in]	1/2	
	Outside diameter [in]	5/8	
	Length [m]	4.20	2.57
	Number [ea]	1792	1087
Shell	Diameter [m]	2.00	1.22
	Height [m]	5.25	3.21
Heat transfer area [m ²]		300.40	111.37
Overall heat transfer coefficient [kJ/(°C m ² s)]		1.88	1.01

Table 2 shows the calculation results for 200MW_{th} and 40MW_{th}. When its scale is 40MW_{th}, the superficial mass flow velocity is lowered and the overall heat transfer coefficient is also decreased. Then, the heat transfer area does not decrease linearly.

Acknowledgments

This study has been performed as one of the mid-and-long-term Nuclear R&D projects.

REFERENCES

- [1] V. Ponyavin, Y. Chen, T. Mohamed, M. Trabia, A. E. Hechanova, M. Wilson, "Parametric study of sulfuric acid decomposer for Hydrogen production, Progress in Nuclear Energy", 50, 427-433, 2008.
- [2] C. Huang, A. T-Raissi, "Analysis of sulfur-iodine thermochemical cycle for solar hydrogen production. Part I: decomposition of sulfuric acid", Solar Energy, 78, 632-646, 2005
- [3] A. Kasnagawa et al., "Conceptual design of SO₃ decomposer for thermal-chemical Iodine-Sulfur process pilot plant," 13th Int. Conf. on Nucl. Eng., Beijing, China, May 16-20, 2005, ICONE13-50451.
- [4] A. Roine, HSC Chemistry ver. 5.1, Outo Kumpu, 2002.
- [5] N. P. Chohey. "Handbook of chemical engineering calculations", 2nd ed., 7-41, New York, McGraw-Hill, 1994.
- [6] R. H. Perry, C. H. Chilton, "Chemical engineers' handbook", 6th ed., 5-53, New York, McGraw-Hill, 1984.